
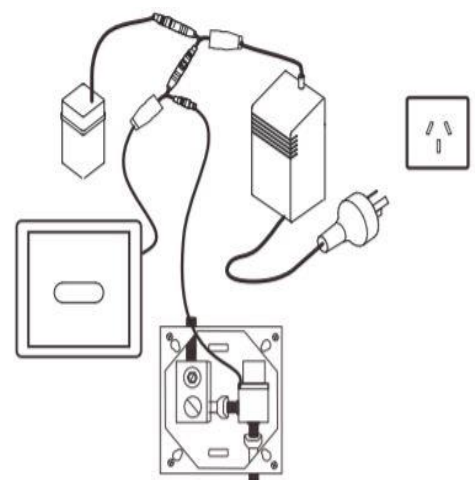
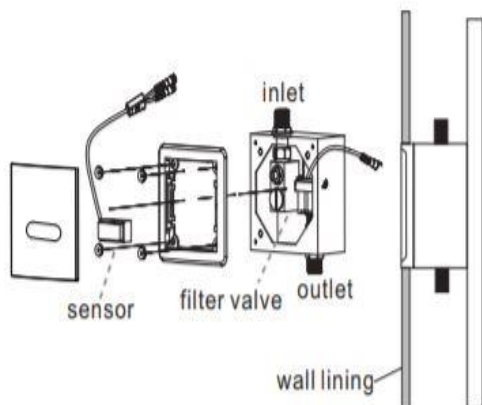


## Specification Summary – ET2-20.5

- Wall mounted sensor plate and spout
- 6 Star WELS
- Watermark
- Highly suitable for Commercial use
- Separate sensor plate makes it suitable for use with stainless steel washplanes/sinks
- Minimal Surfaces – ideal for Hospitals, Clinics Laboratories and all public bathrooms
- Easy front panel access for maintenance
- Unit is recessed into wall cavity – requires 90mm
- Only front panel is visible after install
- Hygienic no touch operation
- No fixed run time for maximum water saving
- Auto off after 1 minute if sensor obstructed
- Adjustable sensor distance – 300-600mm
- Confirmation time of 1-2 seconds – minimising false activation
- Battery only or mains power with battery back-up
- Water pressure range between 100-500kPa
- Water Inlet – 15MM ½" G
- Single water feed – pre-mix water
- Water temperature - 1-50°
- Transformer cable (if used) approx. 1M

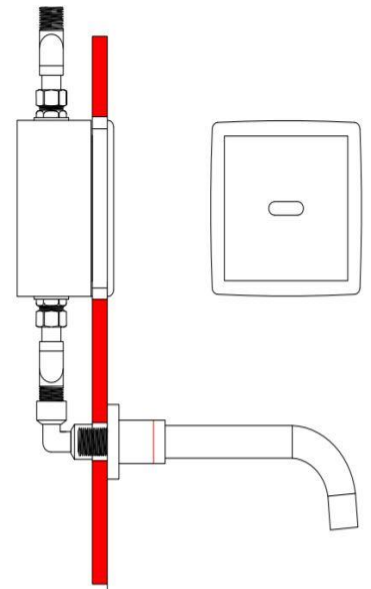

Contact Us:

Australia – 1300 530 883 or [info@enviro-tech.com.au](mailto:info@enviro-tech.com.au)  
 New Zealand – 0800 2 ENVIRO or [info@enviro-tech.co.nz](mailto:info@enviro-tech.co.nz)