


Specification Summary – ET4-40

- 4 Star WELS sensor operated toilet - dual flush electronic faceplate
- 4 Star WELS in-wall cistern
- Stylish black glass LED faceplate
- Watermark
- Highly suitable for Commercial or Domestic use
- PWD toilet compatible
- Hygienic no touch operation
- Swipe on/off function for half and full flush
- Manual pneumatic override button
- Half flush of 3L and full flush of 4.5L
- Average Flush of 3.3L
- Detection zone of 1.2M – ensure clearance of at least 1.2M from wall/door opposite faceplate
- Moulded polymer seamless cistern (78mm thickness)
- Cistern – top water supply and front access.
- Cistern includes flush pipe, seals and fixings for use with a floor mounted toilet
- Suitable for wall hung toilet – use frame supplied with toilet pan
- Easy Access for maintenance through front faceplate
- Auto hygiene ½ flush every 72hrs when not used
- Water Inlet and Outlet – 25mm 1” G
- Water temperature - 1-50°
- In high use areas – good water pressure recommended for rapid fill of cistern
- Suitable for low water pressure – cistern will take longer to fill

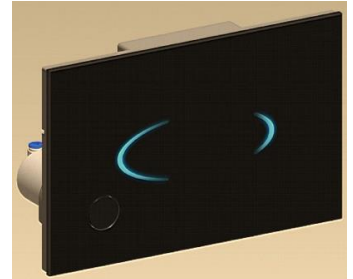

FUNCTION:

- User enters detection zone – full and half flush indicator lights illuminate
- Must detect user present in field for constant 8 seconds before entering flush cycle
- User to swipe ½ or full flush to activate after use
- If user leaves zone without flushing – full flush will light up and toilet will perform full flush after delay of 3 seconds
- Full flush light will stay on for 7 seconds after flush

Contact Us:

Australia – 1300 530 883 or info@enviro-tech.com.au
 New Zealand – 0800 2 ENVIRO or info@enviro-tech.co.nz